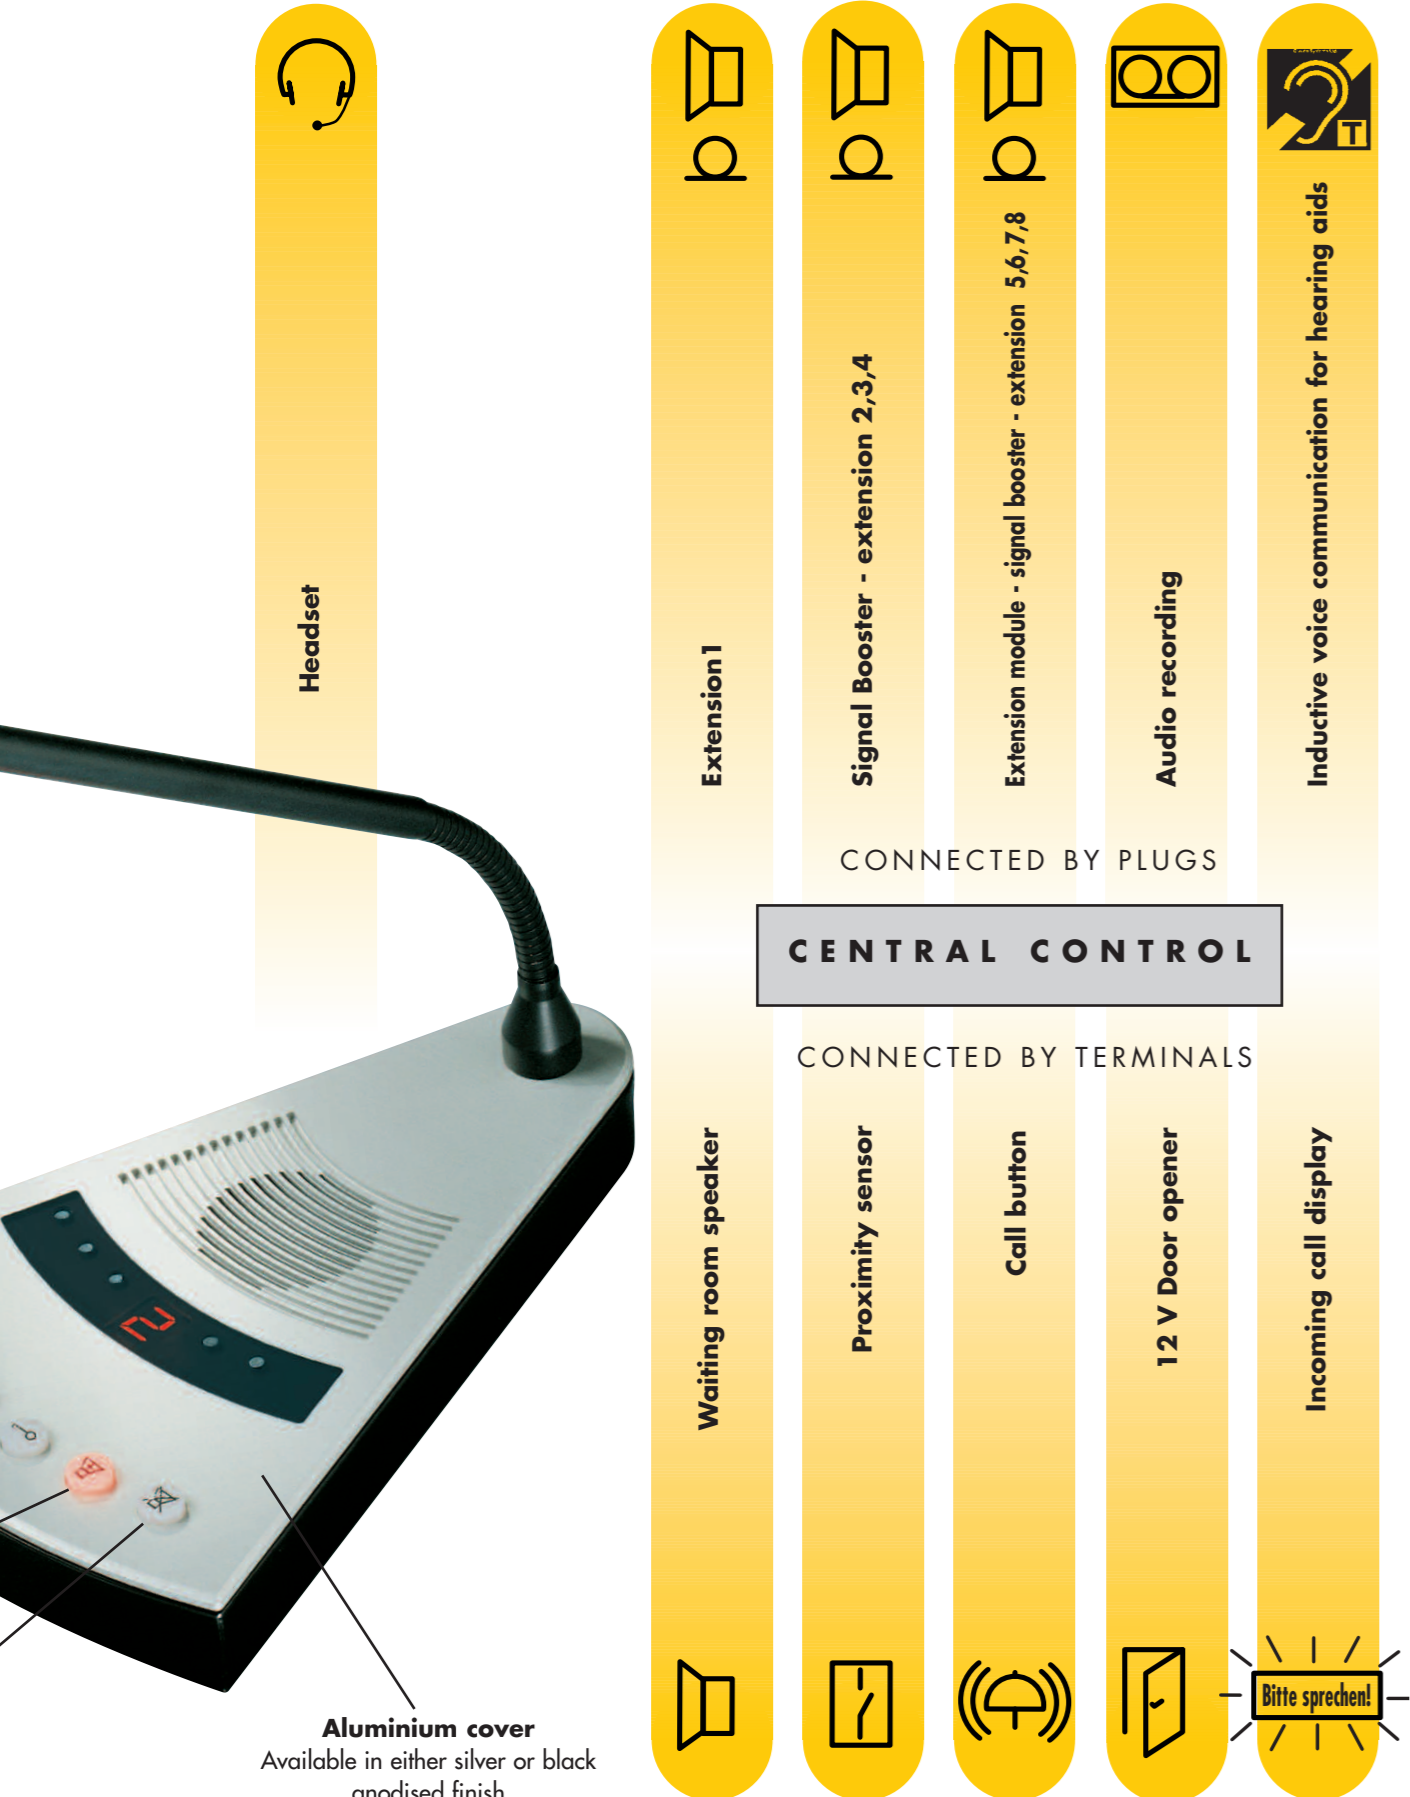


com system!



DELTA,



...the talented intercom system!

ATTACHMENTS:

To connect extensions 2 - 8, a signal booster per extension is required
 Delivery range:
 Signal booster with mains adapter and 10 m cable
Purch. No.1005.00

To connect extensions 5 - 8, an expansion module is required for the central control unit
Purch. No.1000.02

Inductive voice communication for hearing aids
Purch. No.1020.00

Extension lead
 Signal booster to the central control unit
10 m Purch. No. 1010.01
25 m Purch. No. 1010.02
50 m Purch. No. 1010.03

We are of course able to supply customised solutions and components for your project.
 Please ask.

INSTALLATION ADVICE:

The best communications will be achieved if individual components are installed as far apart as possible.
 Microphones should be installed at speaking height. Avoid positioning the loudspeakers near to, or opposite the microphones.
 We can provide assistance with the layout of your project.

TECHNICAL DETAILS:


Connection 230 Volt/50 Hz
 Operational voltage 12 Volt/DC
 Volume increase 6 dB
 4 Watts per channel
 Non-volatile memory (all settings will be stored in the event of power failure)
 16-step feedback suppression



SITEC GmbH
 Johann-Georg-Herzog-Str.19
 D-96369 Weißenbrunn
 Germany

Telefon: +49 (0) 92 61/ 60 75-0
 Telefax: +49 (0) 92 61/ 60 75-10

eMail: info@sitec.de
 Internet: www.sitec.de



DELTA, the intelligent intercom system with numerous possibilities.

Perfect communication at the customer counter.

The ideal system for Embassy & Bank Counters, Night Desks, Ticket Offices, Currency Exchange Offices, Railway Stations, Cash Desks, Toll Booths, Porter's Boxes, Social Security & Local Authority Offices.

DELTA: Functional Overview

The DELTA intercom system was specially designed for counters with security glazing, where clear but secure communication between staff and customer is required.

To ensure that optimum communications are achieved, all audio components (headset, wall telephone, door intercom) connected to the DELTA system and each extension in and extension out have separate adjustable volume control, which can be saved and automatically retrieved.

An LED indicator displays all the settings. Even under difficult acoustic conditions, the latest chip technology ensures perfect communications.

Easy to operate set-up menu for the different operational modes (e.g. hands-free, intercom, stand-by function, gong, mute switch).


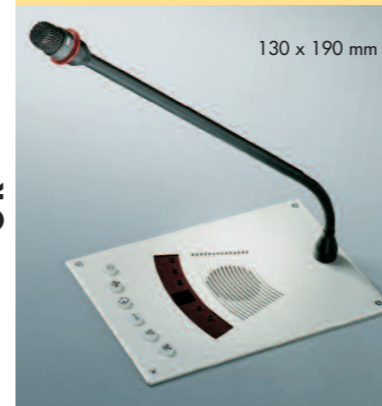
The swan-neck microphones are equipped with an illuminated ring at the mouthpiece, which illuminates when operational.

Connecting and adjusting the intercom system is very simple, requiring no specialised knowledge. All adjustments are done manually on the front face of the control unit. No tools are required.

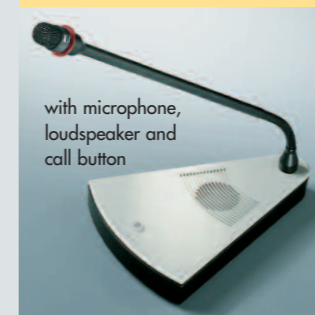
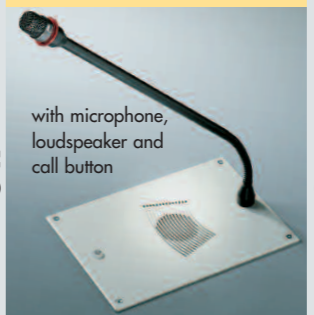


In addition a range of door openers, gongs, proximity switches and hearing aid inductive loop modules can be connected.

DELTA can be expanded with up to 7 additional extensions. Extensions can be combined in a variety of ways to ensure that the perfect communications solution is achieved for each situation.

THE MAIN CONTROL UNITS:

Desktop version  140 x 195 mm Purch.No. 1030.01 silver Purch.No. 1030.02 black	OR	Built-in version  130 x 190 mm Purch.No. 1032.01 silver Purch.No. 1032.02 black
--	----	---

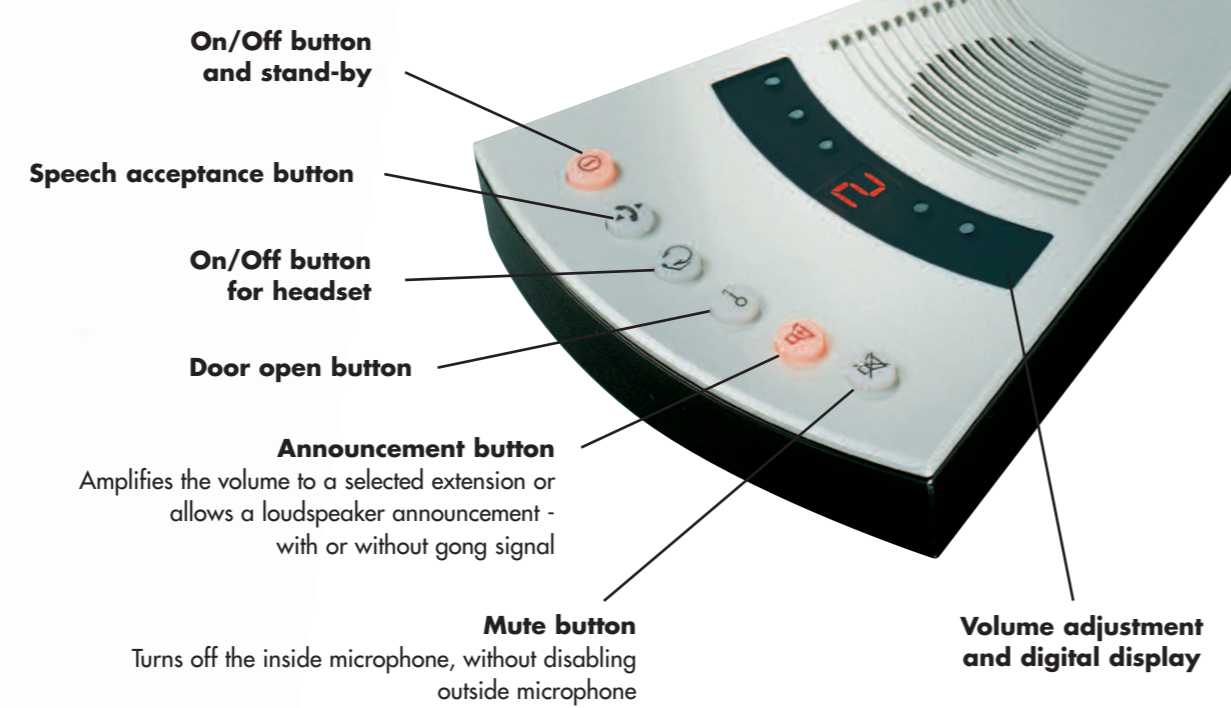
THE EXTENSIONS:

Desktop version  with microphone, loudspeaker and call button Purch.No. 1035.01 silver Purch.No. 1035.02 black	OR	Built-in version  with microphone, loudspeaker and call button Purch.No. 1037.01 silver Purch.No. 1037.02 black	OR	Wall telephone  with call button stainless steel Purch.No. 1040.00 surface mounted	OR	Door intercom  with microphone, loudspeaker and call button stainless steel Purch.No. 1050.00 surface mounted Purch.No. 1051.00 built-in
--	----	---	----	--	----	---



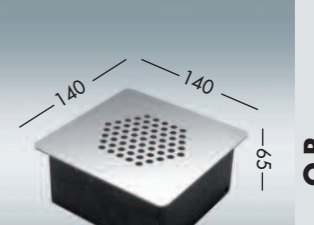
THE MAIN CONTROL

Easy to operate - with numerous operational features.

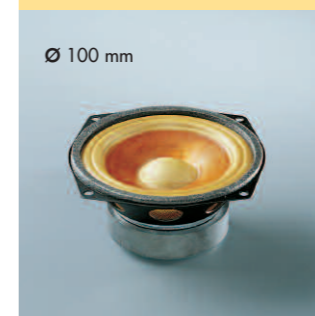

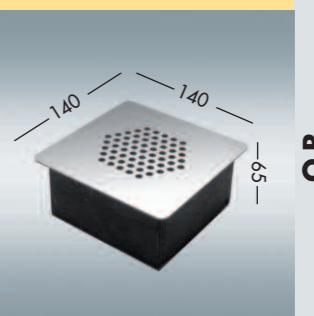
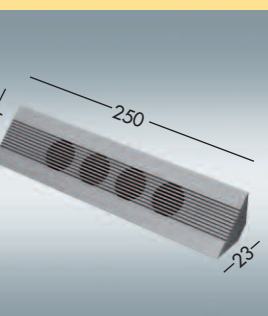


- On/Off button and stand-by**
- Speech acceptance button**
- On/Off button for headset**
- Door open button**
- Announcement button**
Amplifies the volume to a selected extension or allows a loudspeaker announcement - with or without gong signal
- Mute button**
Turns off the inside microphone, without disabling outside microphone
- Volume adjustment and digital display**

OR YOU CAN HAVE EXTENSIONS COMBINED WITH MICROPHONES:

Capsule microphone  Ø 12 mm Purch.No. 1100.00	OR	Swan-neck microphone with illuminated ring  80 x 100 mm Purch.No. 1105.01 silver Purch.No. 1105.02 black	OR	Built-in microphone with cover plate  140 x 140 x 65 mm Purch.No. 1110.01 silver Purch.No. 1110.02 black	OR	Three panel strip with microphone  250 x 19 mm Purch.No. 1120.01 Microlacquered
---	----	---	----	---	----	--

AND LOUSPEAKERS:

Loudspeaker for installation  Ø 100 mm Purch.No. 1200.00	OR	Ceiling loudspeaker  Ø 105 mm Purch.No. 1205.03 white	OR	Built-in loudspeaker with cover plate  140 x 140 x 65 mm Purch.No. 1210.01 silver Purch.No. 1210.02 black	OR	Three panel strip with loudspeakers  250 x 19 mm Purch.No. 1220.01 Microlacquered
---	----	--	----	---	----	---

ATTACHMENTS FOR MAIN CONTROL

Headset  Purch.No. 1015.00	OR	Cordless headset  Purch.No. 1016.00
--	----	---